

Specifications

Output Power HP (kW)	1/4 (0.2)
Phase	3 Phase
Pole	4 Pole
Frame Number	63M

Degrees of Protection	IP 55
Enclosure Construction	Totally-enclosed Fan-cooled
Thermal Class	Class F (155 °C)

Alignment	Horizontal
Frame Material	Steel plate

Power Transmission	Direct-couple or Belt Driven
Direction of Rotation	Counterclockwise (CCW) viewed from shaft-end side

Connection Type	Terminal Block (6 Leads)
Coating Colour	Munsell N5.5 (Gray)
Conformed Standard	IEC 60034-1 & JEC-2137-2000

Voltage & Frequency	LT Type	
	220/380~415V	50Hz
	220/440V	60Hz

Motor Characteristics

Type	Hz	V	50% Load			75% Load			100% Load				Torque(%)		Is (A)	Inertia GD ² (kg-m ²)	
			(A)	Eff(%)	PF(%)	(A)	Eff(%)	PF(%)	(A)	Eff(%)	PF(%)	Speed (r/min)	Torque (kg-m)	Ts			Tm
LT	50	220	0.91	0.60	0.48	1.00	0.67	0.59	1.11	0.69	0.68	1430	0.140	330	257	5.11	0.0040
		380	0.53	0.60	0.48	0.58	0.67	0.59	0.64	0.69	0.68	1430	0.140	330	257	2.95	
		415	0.61	0.55	0.42	0.64	0.63	0.52	0.68	0.68	0.60	1440	0.140	399	309	3.27	
60	220	0.73	0.66	0.54	0.84	0.71	0.66	0.97	0.73	0.74	1730	0.110	284	232	4.56		
	440	0.50	0.58	0.46	0.53	0.65	0.56	0.59	0.69	0.65	1750	0.110	378	310	3.01		

* The perpendicular variation of tolerance for the shaft center is $\begin{matrix} 0 \\ -0.5 \end{matrix}$

Dimensions (mm)


Motor														
A	B	C*	D	E	F	G	H	L	M	N	X	XB	Z	
121.4	73.6	63	130	50	40	2.3	126.3	224.4	135	100	12	40	7	

Terminal Box					Shaft End			
KA	KG	KD	KL	KP**	Q	R	S	U
38.4	75	PF 1/2	130	162	23	103	11 h6	1

Bearing No.		Approximated Weight (kg)	Approximated Packing Dimensions (LxWxH)	Gross Weight (kg)
Drive End	Opposite			
6201ZZ	6201ZZ	5.6	245 x 221 x 193	6

** This dimension is for model that KP > H only

Connection & Connection Diagram

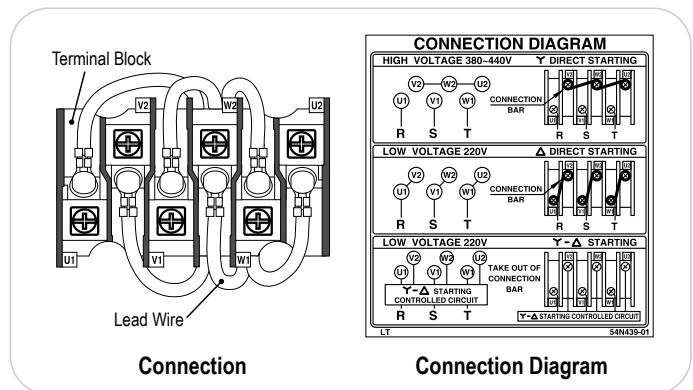

Circumstance Conditions

Ambient Temperature	-20 ~ +40°C
Ambient Humidity	95% RH or less
Operating Altitude	Less than 1,000m above sea level
Environment	No bursting / erosive gas or vapor